



My Choice: TRIX®
Best for Industry.







One Brand. Many Solutions.

When it comes to media transport, even under the harshest industrial conditions, the TRIX® brand hose family is the right choice. Whether it's breathing air, combustible gases, CO₂, fuels, compressed air containing oil, mineral oils, technical alcohols, acids or many other media – our products are individually tailored to the application and will safeguard your operations with high reliability. Robust, top-class products for almost any application in industry, trade and transport.

TRIX®: My Choice, My Advantages.


- › Maximum cost-effectiveness over the entire service life
- › Transportation of a wide range of media
- › System solutions for every industrial application
- › Individual system consultation
- › Safety even under extreme loads

	Agriculture	Construction	Mining & Quarries	Metallurgical Industry & Foundries	Installation & Welding Companies	Municipal Facilities	Mechanical Engineering	Oil & Chemical Industry	Shipyards, Steel & Body Construction	Auto Repair Shops & Garages
TRIX ROTSTRAHL®	x	x	x			x	x			x
EURO TRIX®	x				x	x	x		x	x
TRIX® SUPER	x	x		x		x	x	x		
CONTI® RADIATOR FLEX	x						x			x
TRIX® AUTOGEN RED / BLUE		x		x	x		x		x	x
TRIX® AUTOGEN BLACK		x		x	x		x		x	x
TRIX® ALL COMBUSTIBLE GAS		x		x	x		x		x	x
TRIX BLAUSTRAHL®		x	x	x			x	x	x	
AIR TRIX®	x	x	x		x	x	x		x	x
UNITRIX® 60/80	x						x	x		x
DAMPF TRIX® 5000				x			x	x		
DAMPF TRIX® 6000 / 6000 OIL				x			x	x		

Quality Is in our DNA.

TRIX® Manufacturing Processes.

Around 90 years ago, an idea that came up in our company became a veritable trademark that has endured to the present: the production of hoses based on the principle of continuous "in-line" production. And so the TRIX® manufacturing process was born. The result is a line of products with a high degree of resistance capability and durability. Since it was first used in 1932, we have been leaders in quality with the TRIX® manufacturing process, which continues to this day. After all, we are continuously aligning production with the growing quality requirements of our customers. This means that TRIX® has been the best thing that could have happened to our customers over the last 90 years.

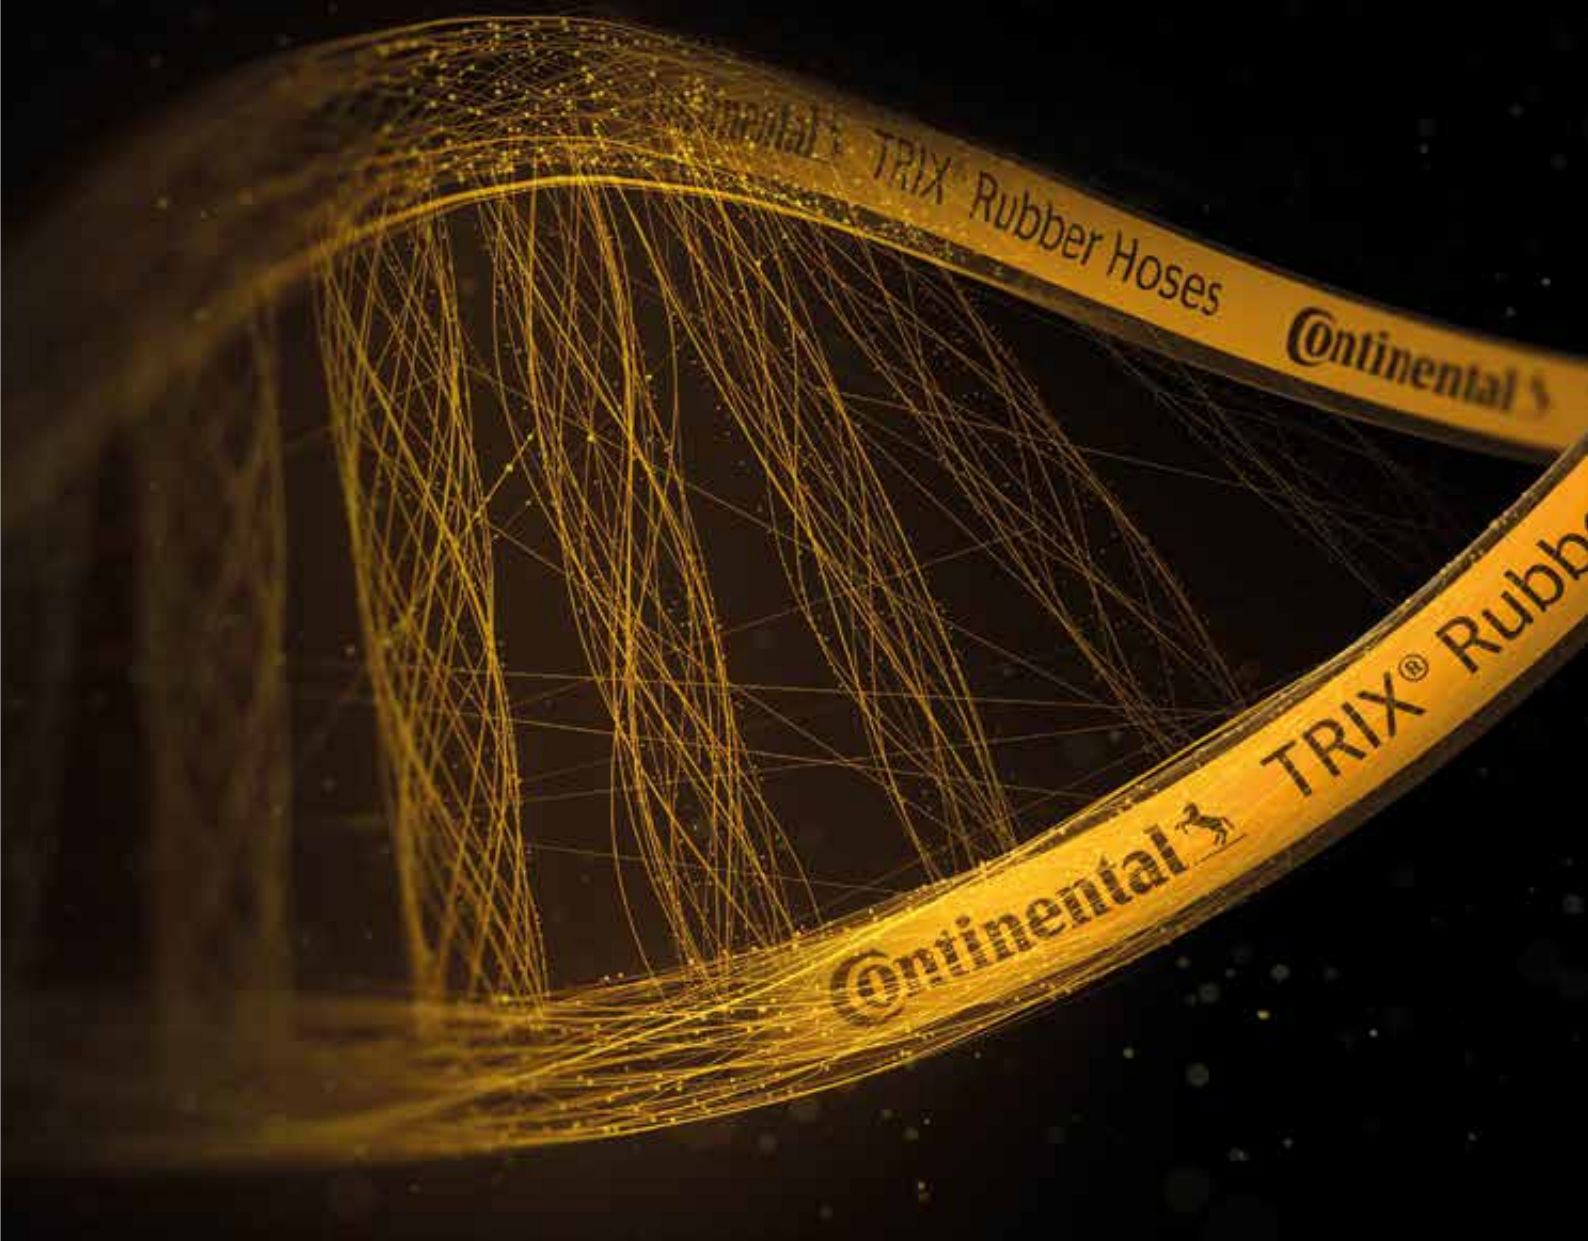

TRIX ROTSTRAHL® EURO TRIX®

The professional
water hoses

Application areas

- › General Industry
- › Trade
- › Construction and Civil Engineering / Mining
- › Municipal facilities
- › Agriculture sector
- › Gardening and Landscaping
- › Fleets and Workshops



Properties

Inner lining

EPDM, black, smooth, non-porous

Reinforcements

Synthetic fibres

Cover

EPDM, black, smooth, ozone-, weather- and UV-resistant
TRIX Rotstrahl®: From DN 28 upward fabric patterned

Further properties

Highly flexible, release agent- and fat-free,
LABS-free up to DN 25,
TRIX Rotstrahl®: Low flow resistance, robust,
EURO TRIX®: Free of twists, kink-resistant

Working pressure: TRIX Rotstrahl®: up to 20 bar / 290 psi
EURO TRIX®: up to 15 bar / 218 psi

Temperature: TRIX Rotstrahl®: -40°C to +100°C /
-40°F to +212°F
EURO TRIX®: -20°C to +100°C / -4°F
to +212°F

REACH RoHS LABS

Regulation EC
1907/2006

2011/65/EC

Free from any
product harmful
to lacquer

Technical Data - EURO TRIX®

Nominal width	Inner Ø	Wall thickness	Length	Working pressure		Min. bursting pressure		Min. bending radius	Weight
inch	mm	mm	m	bar	psi	bar	psi	approx. mm	approx. g/m
1/2	13	3.5	40	15	218	45	653	50	265
5/8	16	3.8	40	15	218	45	653	65	360
3/4	19	4.0	40	15	218	45	653	70	435
1	25	4.5	40	15	218	45	653	120	580

Pressure data based on room temperature / high pressure and/or temperature lead to a reduction of the service life

Technical data - TRIX ROTSTRAHL®

Nominal width	Inner Ø	Wall thickness	Length	Working Pressure		Min. bursting pressure		Min. bending radius	Weight
inch	mm	mm	m	bar	psi	bar	psi	approx. mm	approx. g/m
1/2	13	3.3	40	20	290	60	870	50	245
1/2	13	3.3	50	20	290	60	870	50	245
1/2	13	3.3	80	20	290	60	870	50	245
5/8	16	3.5	40	20	290	60	870	60	330
3/4	19	4.0	40	20	290	60	870	65	435
3/4	19	4.0	50	20	290	60	870	65	435
3/4	19	4.0	80	20	290	60	870	65	435
7/8	22	4.5	40	20	290	60	870	70	520
1	25	4.5	40	20	290	60	870	110	580
1	25	4.5	50	20	290	60	870	110	580
1 1/8	28	5.0	40	15	218	45	653	120	715
1 3/16	30	5.5	40	15	218	45	653	140	835
1 1/4	32	5.5	40	15	218	45	653	170	890
1 3/8	35	5.5	40	15	218	45	653	180	940
1 1/2	38	6.0	40	15	218	45	653	200	1100
1 9/16	40	6.0	40	15	218	45	653	240	1150
1 5/8	42	6.0	40	10	145	30	435	250	1250
2	50	7.0	40	10	145	30	435	300	1565

Pressure data based on room temperature / high pressure and/or temperature lead to a reduction of the service life

TRIX® SUPER

The high-performance water hose

Application areas

- › Agriculture sector
- › Construction industry
- › Metallurgical Industry & Foundries
- › Municipal facilities
- › Mechanical Engineering
- › Oil & Chemical Industry



Properties

Inner lining

EPDM, black, smooth, non-porous

Reinforcements

Synthetic fibres

Cover

EPDM, black, smooth, abrasion-, ozone-, weather- and UV-resistant

Further properties

Highly flexible, LABS-free, release agent- and fat-free, low flow resistant, robust, length independently electrically conductive, $R < 10^6 \Omega$

Working pressure: up to 30 bar / 435 psi
Temperature: -40°C to +120°C / -40°F to +248°F

REACH RoHS LABS

Regulation EC
1907/2006

2011/65/EC

Free from any
product harmful
to lacquer



Technical Data - TRIX® SUPER

Nominal width	Inner Ø	Wall thickness	Length	Working pressure		Min. bursting pressure		Min. bending radius	Weight
inch	mm	mm	m	bar	psi	bar	psi	approx. mm	approx. g/m
3/8	10	3,5	50	30	435	90	1305	35	225
1/2	13	4,0	50	30	435	90	1305	50	315
5/8	16	4,0	50	30	435	90	1305	60	310
3/4	19	4,5	50	30	435	90	1305	65	480
1	25	5,0	50	30	435	90	1305	110	650

Pressure data based on room temperature / high pressure and/or temperature lead to a reduction of the service life

CONTI® RADIATOR FLEX

For cooling and heating systems

Application areas

- › Agriculture sector
- › Mechanical Engineering
- › Auto Repair Shops & Garages
- › General Industry
- › Cooling and heating systems
- › Cooling systems for Combustion Engines



Properties

Inner lining

EPDM, black, smooth, non-porous

Reinforcements

Aramid

Cover

EPDM, black, smooth, abrasion-resistant, ozone-, weather- and UV-resistant, from DN 25 upward fabric patterned

Further properties

Tested in accordance with DBL6254.12 and DBL6254.16 requirements

Working pressure:

up to 3 bar / 44 psi

Temperature:

-40°C to +135°C / -40°F to +275°F
+160°C / 320°F for brief periods



REACH RoHS

Regulation EC
1907/2006

2011/65/EC

DIN

DIN 73411-B

SAE

SAE J20 R3/R4
D3 - HT - EC



Technical Data - CONTI® RADIATOR FLEX

Nominal width	Inner Ø	Wall thickness	Length	Working pressure		Min. bursting pressure		Min. bending radius	Weight
inch	mm	mm	m	bar	psi	bar	psi	approx. mm	approx. g/m
1/4	6	3.5	40	3	44	12	174	45	125
5/16	8	3.5	40	3	44	12	174	60	152
3/8	10	4.5	40	3	44	12	174	75	240
1/2	12	4.5	40	3	44	12	174	100	272
5/8	15	4.5	40	3	44	12	174	135	321
3/4	18	4.5	40	3	44	12	174	165	371
3/4	20	4.5	40	3	44	10	145	195	403
7/8	22	4.5	40	3	44	10	145	200	436
1	25	4.5	40	3	44	10	145	240	482
1 1/8	28	4.5	40	3	44	10	145	280	532
1 3/16	30	6.0	40	3	44	10	145	300	788
1 1/4	32	6.0	40	3	44	10	145	320	826
1 3/8	35	6.0	40	3	44	10	145	350	896
1 1/2	38	6.0	40	3	44	10	145	380	963
1 5/8	42	6.0	40	3	44	6	87	420	1050
1 3/4	45	6.0	40	3	44	6	87	450	1115
2	50	6.0	40	3	44	6	87	500	1226
2 1/8	55	6.0	40	3	44	6	87	550	1323
2 3/8	60	6.0	40	3	44	6	87	600	1437
2 5/8	65	6.0	40	3	44	6	87	650	1547
2 3/4	70	6.0	40	3	44	6	87	700	1656
3	75	6.0	40	3	44	6	87	750	1762
3 1/8	80	6.0	20	3	44	6	87	800	1867
4	100	6.0	10	3	44	6	87	1000	2313

Pressure data based on room temperature / high pressure and/or temperature lead to a reduction of the service life

TRIX® AUTOGEN RED / BLUE

For acetylene and
oxygen

Application areas

- › Construction industry
- › Metallurgical Industry & Foundries
- › Installation & Welding Companies
- › Mechanical Engineering
- › Shipyards, Steel and Body Construction
- › Auto Repair Shops & Garages
- › Welding Workshops and for Welding Equipment Manufacturers



Properties

Inner lining

EPDM, black, smooth, non-porous, electrically conductive,
 $R < 10^6 \Omega/m$

Reinforcements

Synthetic fibres

Cover

EPDM, smooth, abrasion-, ozone-, weather- and UV-resistant

Further properties

Dimensionally stable, highly flexible, kink-resistant,
LABS-free, release agent- and fat-free, halogen-free, robust

Working pressure:

up to 20 bar / 290 psi

Temperature:

from -40°C to +60°C / -40°F to +140°F

REACH RoHS LABS

Regulation EC
1907/2006

2011/65/EC

Free from any
product harmful
to lacquer

DIN EN ISO

DIN EN ISO
3821:2020



Technical Data - TRIx® AUTOGEN RED

Nominal width	Inner Ø	Wall thickness	Length	Working pressure		Min. bursting pressure		Min. bending radius	Weight
inch	mm	mm	m	bar	psi	bar	psi	approx. mm	approx. g/m
1/6	4	3.5	40	20	290	60	870	15	130
1/4	6.3	3.5	40	20	290	60	870	25	170
3/8	9	3.5	40	20	290	60	870	35	210
7/16	11	3.5	40	20	290	60	870	55	250
1/2	12.5	4.5	40	20	290	60	870	50	370
5/8	16	4.5	40	20	290	60	870	65	430

Pressure data based on room temperature / high pressure and/or temperature lead to a reduction of the service life

Technical Data - TRIx® AUTOGEN BLUE

Nominal width	Inner Ø	Wall thickness	Length	Working pressure		Min. bursting pressure		Min. bending radius	Weight
inch	mm	mm	m	bar	psi	bar	psi	approx. mm	approx. g/m
1/6	4	3.5	40	20	290	60	870	15	130
1/4	6.3	3.5	40	20	290	60	870	25	170
1/4	6.3	5.0	40	20	290	60	870	20	260
3/8	9	5.0	40	20	290	60	870	30	330
7/16	11	5.0	40	20	290	60	870	35	370
1/2	12.5	5.0	40	20	290	60	870	45	400
5/8	16	6.0	40	20	290	60	870	55	600

Pressure data based on room temperature / high pressure and/or temperature lead to a reduction of the service life

TRIX® AUTOGEN BLACK

For air, nitrogen,
argon, CO₂

Application areas

- › Metallurgical Industry & Foundries
- › Installation & Welding Companies
- › Mechanical Engineering
- › Shipyards, Steel and Body Construction
- › Auto Repair Shops & Garages
- › Welding Equipment Manufacturers



Properties

Inner lining

EPDM, black, smooth, non-porous

Reinforcements

Synthetic fibres

Cover

EPDM, black, smooth, abrasion-, ozone-, weather- and UV-resistant

Further properties

Dimensionally stable, highly flexible, kink-resistant, LABS-free, release agent- and fat-free, halogen-free, robust, electrically conductive, $R < 10^6 \Omega/m$

Working pressure: up to 20 bar / 290 psi
Temperature: -40°C to +60°C / -40°F to +140°F

REACH RoHS LABS


Regulation EC
1907/2006

2011/65/EC

Free from any
product harmful
to lacquer

DIN EN ISO

DIN EN ISO
3821:2020

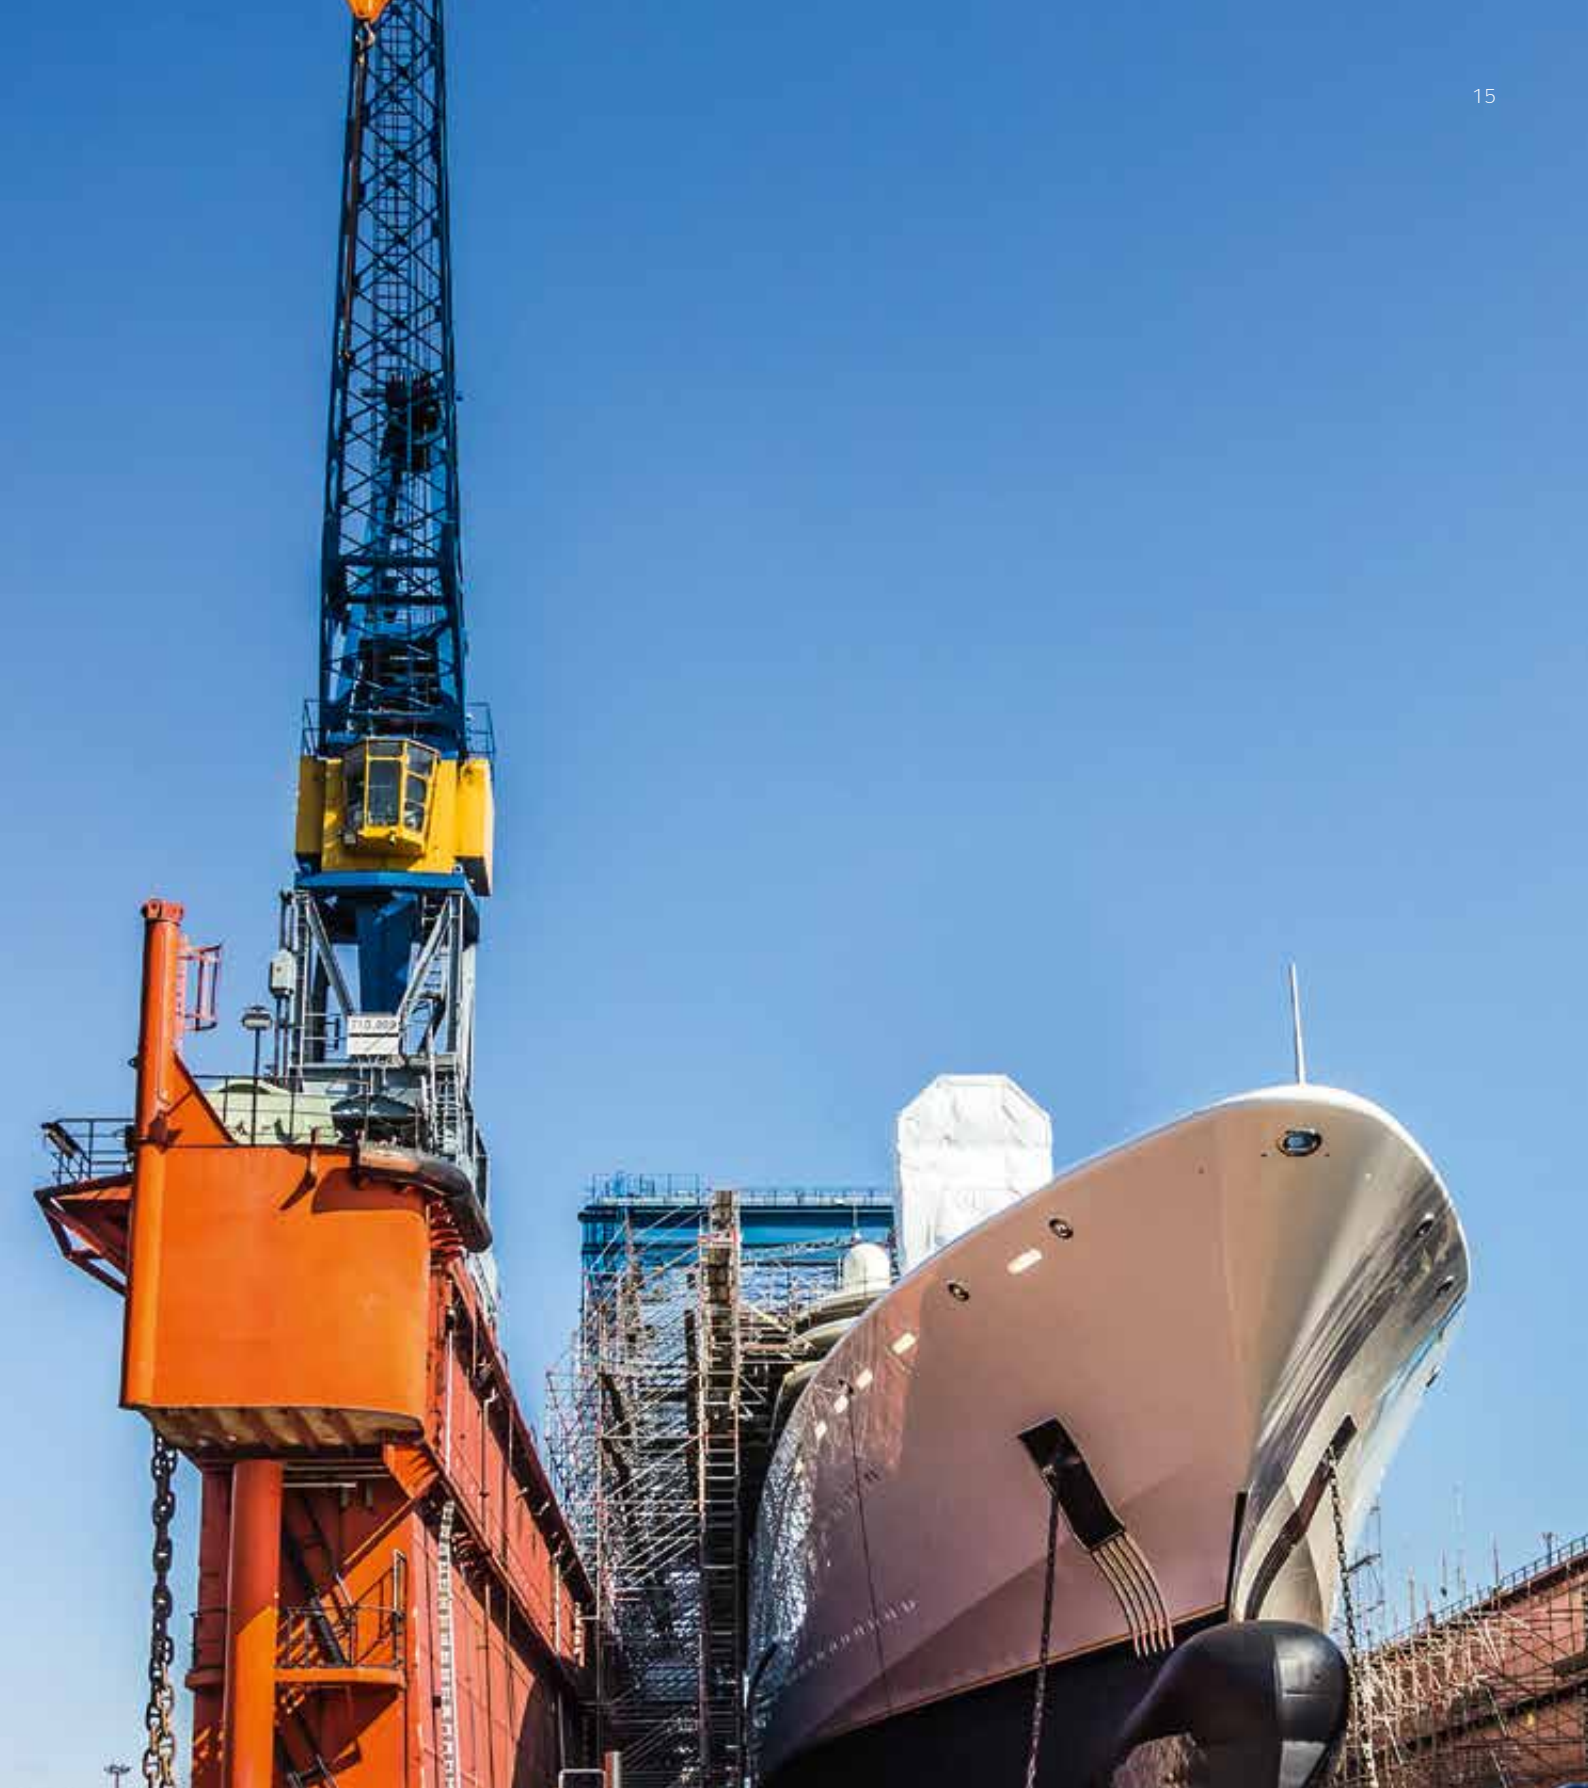

Technical Data - TRIX® AUTOGEN BLACK

Nominal width	Inner Ø	Wall thickness	Length	Working pressure		Min. bursting pressure		Min. bending radius	Weight
inch	mm	mm	m	bar	psi	bar	psi	approx. mm	approx. g/m
1/4	6.3	3.5	40	20	290	60	870	25	170
3/8	9	3.5	40	20	290	60	870	35	210
5/8	16	4.5	40	20	290	60	870	65	385

Pressure data based on room temperature / high pressure and/or temperature lead to a reduction of the service life

TRIX® ALL COMBUSTIBLE GAS

For fuel gas and
liquid gas

Application areas

- › Bridge Building
- › Vehicle Construction
- › Foundries
- › Building Construction and Civil Engineering
- › Installation and Heating Operations
- › Welding Equipment Manufacturers
- › Welding Workshops
- › Steel industry
- › Shipyards



Properties

Inner lining

NBR, black, smooth, non-porous

Reinforcements

Synthetic fibres

Cover

NBR, red-orange, smooth, abrasion-resistant, ozone-, weather- and UV-resistant, from DN 32 upward fabric patterned

Further properties

Highly flexible, release agent- and fat-free, LABS-free up to DN 20, dimensionally stable, kink-resistant, robust, inner layer electrically conductive, $R < 10^6 \Omega$

Working pressure: up to 20 bar / 290 psi
Temperature: -40°C to +60°C / -40°F to +140°F

REACH RoHS LABS

Regulation EC
1907/2006

2011/65/EC

Free from any
product harmful
to lacquer

DIN EN ISO

DIN EN ISO
3821:2020



Technical Data - TRIX® ALL COMBUSTIBLE GAS

Nominal width	Inner Ø	Wall thickness	Length	Working pressure		Min. bursting pressure		Min. bending radius	Weight
inch	mm	mm	m	bar	psi	bar	psi	approx. mm	approx. g/m
1/4	6.3	3.5	40	20	290	60	870	25	170
3/8	9	3.5	40	20	290	60	870	35	210
7/16	11	3.8	40	20	290	60	870	45	280
1/2	12.5	4.5	40	20	290	60	870	50	370
5/8	16	4.5	40	20	290	60	870	65	430
3/4	20	5.0	40	20	290	60	870	80	590
1 1/4	32	5.5	40	20	290	60	870	210	950

Pressure data based on room temperature / high pressure and/or temperature lead to a reduction of the service life

TRIX BLAUSTRahl®

For heavy-duty compressed air applications

Application areas

- › Construction industry
- › Building Construction and Civil Engineering
- › Compressor Manufacturers
- › Mining & Quarries
- › Metallurgical Industry & Foundries
- › Mechanical Engineering
- › Oil & Chemical Industry
- › Steel and iron Construction



Properties

Inner lining

NBR, black, smooth, non-porous

Reinforcements

Synthetic fibres

Cover

NBR, black, smooth, abrasion-resistant, ozone-, weather- and UV-resistant, from CR 28 hose cover (fabric patterned)

Further properties

Highly flexible, release agent- and fat-free, LABS-free up to DN 25, high oil resistance, RMA Class A, robust, length independently electrically conductive, $R < 10^6 \Omega$

Working pressure:

up to 25 bar / 363 psi

Temperature:

-40°C to +85°C / -40°F to +185°F

REACH RoHS LABS

Regulation EC
1907/2006

2011/65/EC

Free from any
product harmful
to lacquer

DIN EN ISO

DIN EN ISO
2398:2017 3C/L-T

DIN EN ISO

DIN EN ISO
2398:2017 2C/L-T



Technical Data - TRIX BLAUSTRABL®

Nominal width	Inner Ø	Wall thickness	Length	Working pressure		Min. bursting pressure		Min. bending radius	Weight
inch	mm	mm	m	bar	psi	bar	psi	approx. mm	approx. g/m
1/4	6	4.5	40	25	363	100	1450	25	250
3/8	10	5.0	40	25	363	100	1450	40	340
1/2	13	5.0	40	25	363	100	1450	60	410
1/2	13	6.0	40	25	363	100	1450	50	510
5/8	15	5.0	40	25	363	100	1450	70	460
5/8	15	6.0	40	25	363	100	1450	60	560
3/4	19	5.0	40	25	363	100	1450	85	590
3/4	19	6.0	40	25	363	100	1450	75	690
1	25	7.0	40	25	363	100	1450	100	1000
1 1/8	28	8.0	40	16	232	64	928	170	1260
1 1/4	32	8.0	40	16	232	64	928	200	1380
1 3/8	35	8.0	40	16	232	64	928	220	1500
1 1/2	38	8.0	40	16	232	64	928	240	1600
1 5/8	42	9.0	40	16	232	64	928	330	2000

Pressure data based on room temperature / high pressure and/or temperature lead to a reduction of the service life

AIR TRIX®

The high quality hose for compressed air

Application areas

- › Agriculture sector
- › Construction industry
- › Mining & Quarries
- › Building Construction and Civil Engineering
- › Installation & Welding Companies
- › Municipal Facilities
- › Mechanical Engineering
- › Shipyards, Steel and iron industry
- › Auto Repair Shops & Garages
- › Compressor Manufacturers



Properties

Inner lining

SBR, black, non-porous, smooth

Reinforcements

Synthetic fibres

Cover

SBR, black, smooth, ozone-, weather- and UV-resistant, abrasion-resistant, resistant to process water and oily air

Further properties

Highly flexible, LABS-free, release agent- and fat-free, resistant to kinking, dimensionally stable, robust, also available in design in accordance with section 10 BVOST (formerly LOBA)

Working pressure: Up to 10 bar / 145 psi (air),
16 bar / 232 psi (water)

Temperature: from -30°C to +70°C / -22°F to +158°F

REACH RoHS LABS

Regulation EC
1907/2006

2011/65/EC

free from any
product harmful
to lacquer

DIN EN ISO DIN

DIN EN ISO
2398:2017 1A

DIN 20018-1



Technical Data - AIR TRIX®

Nominal width	Inner Ø	Wall thickness	Length	Working pressure		Min. bursting pressure		Min. bending radius	Weight
inch	mm	mm	m	bar	psi	bar	psi	approx. mm	approx. g/m
3/8	10	5.0	40	10	145	40	580	70	340
1/2	13	5.0	40	10	145	40	580	80	410
5/8	15	4.5	40	10	145	40	580	100	560
3/4	19	6.0	40	10	145	40	580	150	690
1	25	7.0	40	10	145	40	580	185	1000


Pressure data based on room temperature / high pressure and/or temperature lead to a reduction of the service life

UNITRIX® 60 UNITRIX® 80

The all-rounder

Application areas

- › Railway Operation
- › Construction Industry
- › Forestry & Agriculture
- › Oil and Chemical Industry

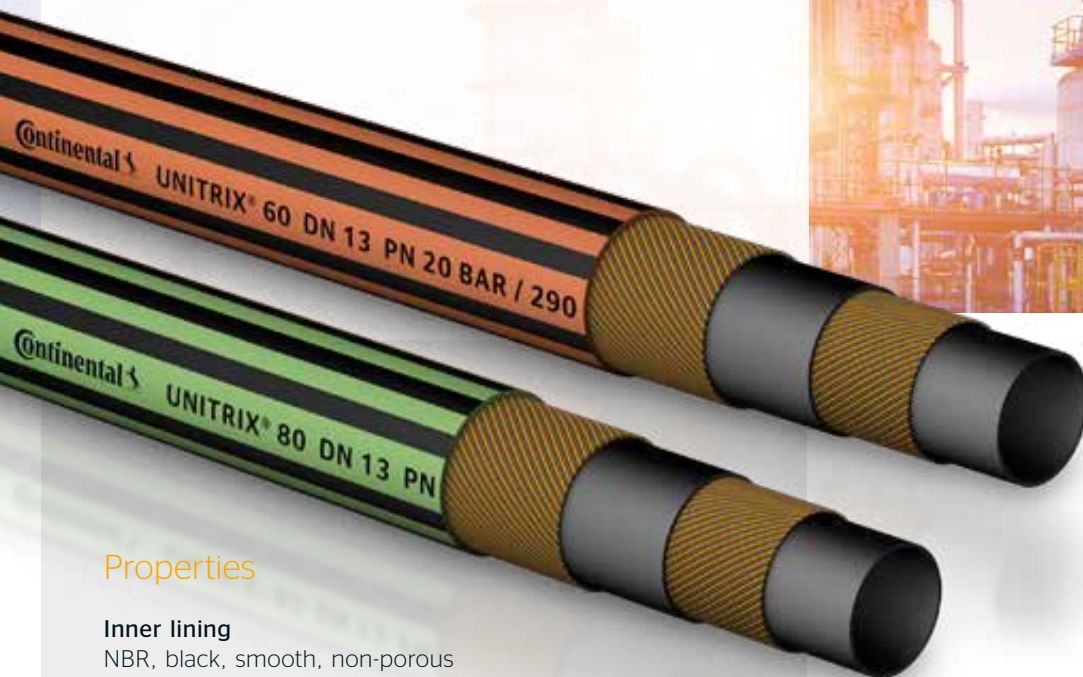

Properties

Inner lining

NBR, black, smooth, non-porous

Reinforcements

Synthetic fibres

Cover

NBR, black, smooth, chemical-resistant, oil-and grease-resistant, ozone-, weather- and UV-resistant,
UNITRIX® 80: from DN 32 CR hose cover (fabric patterned)

Further properties

Highly flexible, release agent- and fat-free, LABS-free (UNITRIX® 80: Up to DN 25), robust, length independently electrically conductive, $R < 10^6 \Omega$

Working pressure:

UNITRIX® 60: Up to 20 bar / 290 psi

UNITRIX® 80: Up to 33 bar / 479 psi

Temperature:

UNITRIX® 60: -25°C to +85°C /

-13°F to +185°F

UNITRIX® 80: -40°C to +85°C /

-40°F to +185°F

REACH RoHS LABS

Regulation EC
1907/2006

2011/65/EC

Free from any
product harmful
to lacquer



Technical Data - UNITRIX® 60

Nominal width	Inner Ø	Wall thickness	Length	Working pressure		Min. bursting pressure		Min. bending radius	Weight
inch	mm	mm	m	bar	psi	bar	psi	approx. mm	approx. g/m
1/4	6	3.5	50	20	290	60	870	25	160
5/16	8	3.8	50	20	290	60	870	35	210
3/8	10	3.8	50	20	290	60	870	40	250
1/2	13	4.0	50	20	290	60	870	55	320
5/8	16	4.5	50	20	290	60	870	65	430
3/4	19	5.0	50	20	290	60	870	85	550
1	25	5.5	50	20	290	60	870	115	760

Pressure data based on room temperature / high pressure and/or temperature lead to a reduction of the service life

Technical Data - UNITRIX® 80

Nominal width	Inner Ø	Wall thickness	Length	Working pressure		Min. bursting pressure		Min. bending radius	Weight
inch	mm	mm	m	bar	psi	bar	psi	approx. mm	approx. g/m
1/4	6	4.0	50	33	479	80	1160	25	190
5/16	8	4.0	50	33	479	80	1160	35	230
3/8	10	4.0	50	33	479	80	1160	40	260
1/2	13	4.5	50	33	479	80	1160	55	370
5/8	16	5.0	50	33	479	80	1160	65	480
3/4	19	6.0	50	33	479	80	1160	85	680
1	25	6.0	50	33	479	80	1160	115	840
1 1/4	32	6.0	40	33	479	80	1160	190	935
1 1/2	38	6.5	40	33	479	80	1160	230	1150
2	50	7.0	40	33	479	80	1160	300	1610
2 3/8	60	8.0	40	33	479	80	1160	400	2260

Pressure data based on room temperature / high pressure and/or temperature lead to a reduction of the service life

DAMPF TRIX® 5000

For conveying
saturated steam

Application areas

- › Construction Industry
- › Mechanical Engineering
- › Tank Wagons
- › Oil and Chemical Industry



Properties

Inner lining

EPDM, black, smooth, non-porous

Reinforcements

Aramid

Cover

EPDM, black, smooth, abrasion-resistant, ozone-, weather- and UV-resistant, from DN 25 upward fabric patterned

Further properties

Highly flexible, resistant to sustained high temperatures, electrically conductive, $R < 10^6 \Omega/\text{line}$

Working pressure:

up to 6 bar / 87 psi

Temperature:

-40°C to +120°C / -40°F to +248°F

Steamable up to:

+164°C / +327°F

REACH RoHS

Regulation EC
1907/2006

2011/65/EC

DIN EN ISO

DIN EN ISO 6134-1A



Technical Data - DAMPF TRIX® 5000

Nominal width	Inner Ø	Wall thickness	Length	Working pressure		Min. bursting pressure		Min. bending radius	Weight
inch	mm	mm	m	bar	psi	bar	psi	approx. mm	approx. g/m
1/2	13	6.0	40	6	87	60	870	130	400
3/4	19	7.0	40	6	87	60	870	190	650
1	25	7.5	40	6	87	60	870	250	900

Pressure data based on room temperature / high pressure and/or temperature lead to a reduction of the service life

DAMPF TRIX® 6000 DAMPF TRIX® 6000 OIL

For conveying steam

Application areas

- › Construction Industry
- › Mechanical Engineering
- › Refineries
- › Shipping Industry
- › Oil and Chemical Industry



Properties

Inner lining

EPDM, black, smooth, non-porous

Reinforcements

2 galvanized reinforcements

Cover

black, fabric patterned, abrasion-resistant, ozone-, weather- and UV-resistant, Dampf Trix® 6000: EPDM, Dampf Trix® 6000 Oil: Special elastomer, resistant to oil and fats

Further properties

Improved resistance against pop corning, heat-resistant liner and cover, electrically conductive, $R < 10^6 \Omega/\text{line}$, bursting pressure $> 180 \text{ bar} / 2,611 \text{ psi}$, safety factor 10:1

Working Pressure: up to 18 bar / 261 psi
Temperature: up to +120°C / +248°F
 Temperature resistance at saturated steam up to +210°C / +410°F, short-term +220°C / +428°F at 23 bar / 333 psi (saturated steam)



REACH RoHS

Regulation EC
1907/2006

2011/65/EC

DIN EN ISO

DIN EN ISO 6134-2B
(Dampf Trix® 6000 Oil)

DIN EN ISO

DIN EN ISO 6134-2A
(Dampf Trix® 6000)



Technical Data - DAMPF TRIX® 6000

Nominal width	Inner Ø	Wall thickness	Length	Working pressure		Min. bursting pressure		Min. bending radius	Weight
inch	mm	mm	m	bar	psi	bar	psi	approx. mm	approx. g/m
3/8	9.5	6.0	40	18	261	180	2611	100	400
1/2	13	6.0	40	18	261	180	2611	130	530
3/4	19	7.0	40	18	261	180	2611	190	900
1	25	7.5	40	18	261	180	2611	250	1200
1 1/4	32	8.0	40	18	261	180	2611	320	1550
1 1/2	38	8.0	40	18	261	180	2611	380	1800
2	50	9.0	40	18	261	180	2611	500	2600

Pressure data based on room temperature / high pressure and/or temperature lead to a reduction of the service life

Technical Data - DAMPF TRIX® 6000 OIL

Nominal width	Inner Ø	Wall thickness	Length	Working pressure		Min. bursting pressure		Min. bending radius	Weight
inch	mm	mm	m	bar	psi	bar	psi	approx. mm	approx. g/m
1/2	13	6.0	40	18	261	180	2611	130	530
3/4	19	7.0	40	18	261	180	2611	190	900
1	25	7.5	40	18	261	180	2611	250	1200
1 1/4	32	8.0	40	18	261	180	2611	320	1550
1 1/2	38	8.0	40	18	261	180	2611	380	1800
2	50	9.0	40	18	261	180	2611	500	2600


Pressure data based on room temperature / high pressure and/or temperature lead to a reduction of the service life

100% Made in Germany.

100% Continental.

TRIX® products are ideally suited for purpose and can also withstand extreme loads. This means that TRIX® hoses offer high process reliability for many industrial sectors.

- › Water Hoses
- › Steam and Cleansing Hoses
- › Air and Multi-purpose Hoses
- › Welding and Gas Hoses
- › Chemical and Oil Hoses
- › Food and Beverage Hoses

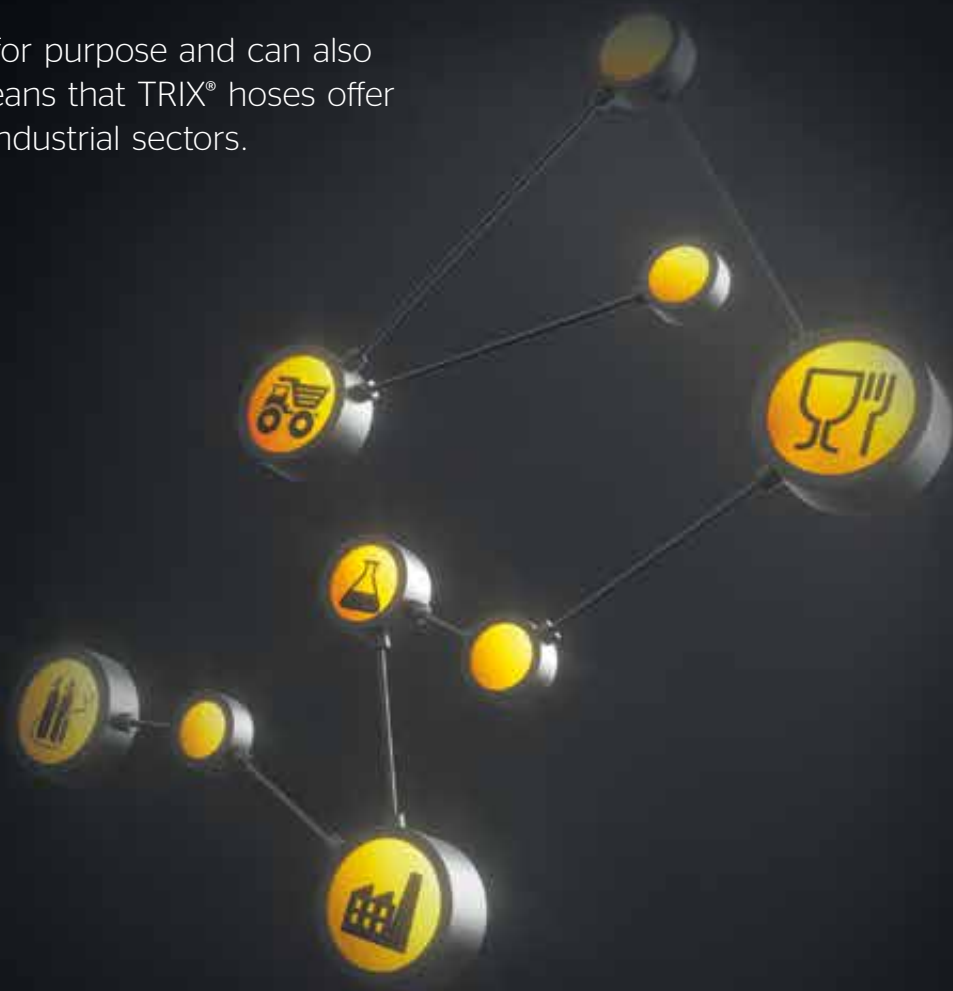

TRIX® CleanJet

- › Cleaning hose for food-processing
- › Corresponds to EC 1935/2004/2023/2006 & FDA
- › Cover and liner are grease- and oil-resistant



TRIX® Propane Gas Hose

- › Ideal for use in pressurized gas containers and gas appliances
- › Compliant with DIN EN 16436-1:2016 CLASS-2, CLASS-3
- › Extremely wear resistant, flexible, and resistant to aging and weatherproof




TRIX® Breathing Hose

- › Meets the requirements of DIN EN 14593/14594
- › Connects the compressed air hose device to the extraction point
- › Not suitable for medical use




TRIX® Nitrogen Hose

- › For displacing and purging explosive gases
- › Reliable even under extreme loads
- › Electrically conductive $R < 10^6 \Omega$

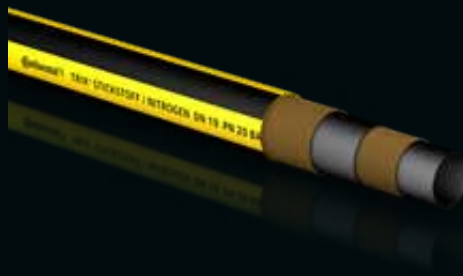

TRIX® Paint spray Hose

- › Ideal for dispersion paints as well as alkyd resin, spirit and polyester paints
- › In NBR or EPDM quality
- › Highly flexible, resistant to twisting and kinking
- › Resistant to temperatures up to +80°C

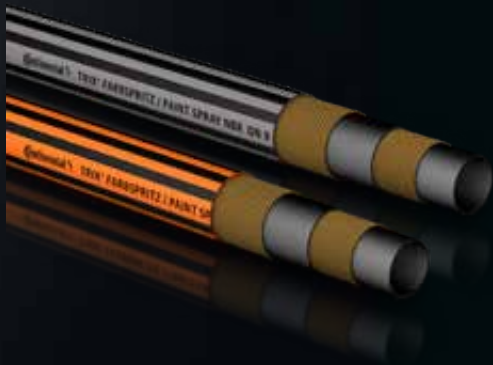

TRIX® Brake Hose

- › The hose brand for pneumatic brake units
- › According to DIN 74310
- › Particularly robust, long-lasting, flexible and resistant to kinking



TRIX® High pressure Hose

- › Ideal for commercial washing machines and dishwashers
- › Suitable for all branded products
- › Working pressure up to 30 bar
- › For hot water up to +95°C



TRIX® Multifood

- › Universal use in all kinds of food-processing operations
- › Meets the requirements of EG 1935/2004 and EG 2023/2006 and FDA



ContiTech Schlauch GmbH

Continentalstrasse 3-5
34497 Korbach, Germany
Phone +49 (0) 5631 58-2575
E-mail industrial.hoses@fluid.contitech.de

For further information:
www.continental-industry.com

**Legal notice**

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2021 ContiTech AG. All rights reserved. For complete information go to: www.continental-industry.com/discl_en