



Agriculture

Thermoplastic & Rubber hoses

ARMORVIN HNA - 913040


Plasticized PVC hose with embedded galvanised steel spiral, for suction and delivery of liquids and liquid food stuffs also with alcohol content of up to 20%.



	SMOOTH SURFACE	*****
	FLEXIBILITY	****
	ABRASION RESISTANCE	***
	TEMPERATURE RANGE	-5° C +65° C
	CHEMICAL RESISTANCE	PVC Table
	CRUSHING RESISTANCE	***
	FOR FOOD	EU according to Declaration of Conformity
	O-PHTHALATE FREE	*****
	DIAMETER RANGE	10 mm to 100 mm

FLORIDA - 911021

PVC hose with PVC rigid spiral, for delivery and suction of liquids.

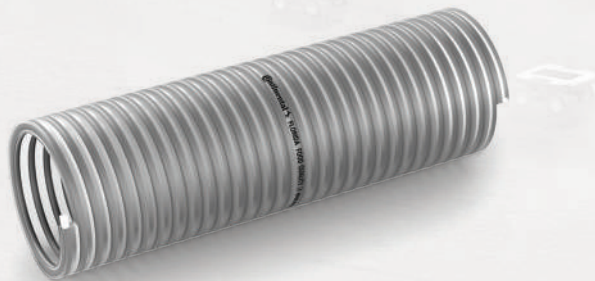

	SMOOTH SURFACE	*****
	FLEXIBILITY	***
	ABRASION RESISTANCE	****
	TEMPERATURE RANGE	-5° C +60° C
	CHEMICAL RESISTANCE	PVC Table
	CRUSHING RESISTANCE	***
	FOR FOOD	EU according to Declaration of Conformity
	DIAMETER RANGE	16 mm to 120 mm

VACUPRESS FLEX - 912934

Two-layer soft PVC hose with embedded galvanised steel spiral with polyester yarn reinforcement, for suction and delivery of liquids.



	SMOOTH SURFACE	*****
	FLEXIBILITY	****
	TEMPERATURE RANGE	-25° C +60° C
	CHEMICAL RESISTANCE	PVC Table
	CRUSHING RESISTANCE	***
	ANTI UV	***
	DIAMETER RANGE	19 mm to 203 mm

SUPERFLEX PU AllRoundDuct

The new premium range of Polyurethane ductings and hoses, from 0.4mm to 1.4mm thickness. To convey abrasive materials.








	SMOOTH SURFACE	*****		MICROORGANISMS RESISTANCE	*****
	FLEXIBILITY	****		ANTISTATIC	R≤109Ω
	ABRASION RESISTANCE	*****		FLAME RETARDANT	According to DIN4102-B1
	TEMPERATURE RANGE	-40° C +90° C		O-PHTHALATE FREE	*****
	CHEMICAL RESISTANCE	PU Table		PHTHALATE FREE	*****
	CRUSHING RESISTANCE	***		ATEX TRGS	See indication of use
	OZONE RESISTANCE	*****		DIAMETER RANGE	38 mm to 300 mm



LUISIANA SUPERELASTIC - 911022


PVC hose with rigid PVC spiral, for delivery and suction of liquids.





	SMOOTH SURFACE	*****
	FLEXIBILITY	*****
	ABRASION RESISTANCE	***
	TEMPERATURE RANGE	-25° C +55° C
	CHEMICAL RESISTANCE	PVC Table
	CRUSHING RESISTANCE	***
	DIAMETER RANGE	19 mm to 204 mm

ARIZONA SUPERELASTIC - 911075

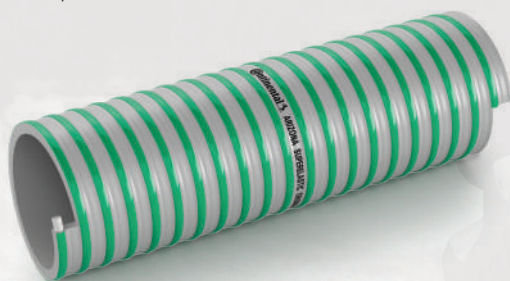
PVC hose with rigid PVC spiral, for suction and delivery of liquids, irrigation systems, cleaning sewage drains and cesspits.



	SMOOTH SURFACE	*****
	FLEXIBILITY	*****
	ABRASION RESISTANCE	***
	TEMPERATURE RANGE	-25° C +55° C
	CHEMICAL RESISTANCE	PVC Table
	CRUSHING RESISTANCE	***
	DIAMETER RANGE	25 mm to 304 mm

ALABAMA - 911194

PVC hose with rigid PVC spiral, for suction and delivery of liquids, irrigation systems, and cleaning sewage drains and cesspits.

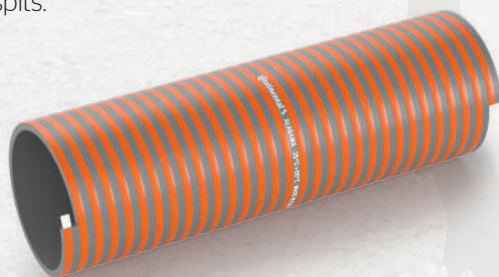












	SMOOTH SURFACE	*****
	FLEXIBILITY	*****
	ABRASION RESISTANCE	***
	TEMPERATURE RANGE	-25° C +55° C
	CHEMICAL RESISTANCE	PVC Table
	CRUSHING RESISTANCE	****
	DIAMETER RANGE	51 mm to 203 mm

OREGON PU ET - 911003

POLYURETHANE (PU) POLYETHER hose with shockproof PVC spiral, for suction and transport of abrasive materials and dry foodstuffs.



	SMOOTH SURFACE	*****
	FLEXIBILITY	*****
	ABRASION RESISTANCE	*****
	TEMPERATURE RANGE	-25° C +85° C
	CHEMICAL RESISTANCE	PU Table
	CRUSHING RESISTANCE	***
	OZONE RESISTANCE	*****
	MICROORGANISMS RESISTANCE	*****
	HYDROLYSIS RESISTANCE	Resistant to hydrolysis in 60°C warm water
	FOR FOOD	EU according to Declaration of Conformity
	DIAMETER RANGE	16 mm to 300 mm

RAGNO N 20 BAR - 915046

PVC hose with polyester yarn reinforcement and PU adhesive intermediate layer for pressure spraying of insecticides, pesticides, and liquids under pressure.



	SMOOTH SURFACE	***
	FLEXIBILITY	***
	ABRASION RESISTANCE	***
	TEMPERATURE RANGE	-5° C +60° C
	CHEMICAL RESISTANCE	PVC Table
	CRUSHING RESISTANCE	***
	DIAMETER RANGE	6X12 mm to 25X34 mm

RAGNO N 40 BAR - 915048

PVC hose with polyester yarn reinforcement and PU adhesive intermediate layer for pressure spraying of insecticides, pesticides, and liquids under pressure.



	SMOOTH SURFACE	*****
	FLEXIBILITY	****
	ABRASION RESISTANCE	***
	TEMPERATURE RANGE	-5° C +60° C
	CHEMICAL RESISTANCE	PVC Table
	CRUSHING RESISTANCE	***
	DIAMETER RANGE	8X13.5 mm to 19X28 mm

RAGNO N 80 BAR - 915065

PVC hose with double polyester yarn reinforcement and PU adhesive intermediate layer for pressure spraying of insecticides, pesticides, and liquids under pressure.



	SMOOTH SURFACE	*****
	FLEXIBILITY	****
	ABRASION RESISTANCE	***
	TEMPERATURE RANGE	-5° C +60° C
	CHEMICAL RESISTANCE	PVC Table
	CRUSHING RESISTANCE	***
	DIAMETER RANGE	8X15 mm to 16X26 mm

SPIRALINA - 926003

Rigid PVC spiral SH. D. (3 SEC.) = 78 ± 3 , for protection from crushing and abrasion (in compliance with ISO 4649 < 150 mm3) of hydraulic hoses, bundling of hoses and cables.




	SMOOTH SURFACE	*****
	FLEXIBILITY	****
	ABRASION RESISTANCE	*****
	TEMPERATURE RANGE	-10° C +60° C
	CHEMICAL RESISTANCE	RIGID PVC Table
	CRUSHING RESISTANCE	*****
	OZONE RESISTANCE	****
	FLAME RETARDANT	Plastic material according to UL 94 V0
	COMPRESSION LOAD	≥130
	METHOD OF CALCULATION	(OUTSIDE hose Ø mm / INSIDE spiral Ø mm) x hose length mt = spiral mt
	DIAMETER RANGE	13X16 mm to 120X132 mm



CONTI RADIATOR FLEX


For heating and cooling systems
According to DIN 73411-B



INNER LINING:	per-EPDM, black, non-porous, smooth
REINFORCEMENTS:	Aramid
COVER:	per-EPDM, black, smooth
WORKING PRESSURE UP TO:	3 bar / 44 psi
TEMPERATURE RANGE:	from -40 °C / -40 °F up to +135 °C / +275 °F
DIAMETER RANGE:	8 mm to 18 mm
STANDARDS:	DIN 73411-B

CONTI COOLING WATER HOSE

For heating and cooling systems



INNER LINING:	per-EPDM, black, non-porous, smooth
REINFORCEMENTS:	Aramid
COVER:	per-EPDM, black, smooth, from DN 25 upward fabric patterned
WORKING PRESSURE UP TO:	6 bar / 87 psi
TEMPERATURE RANGE:	from -40 °C / -40 °F up to +135 °C / +275 °F
DIAMETER RANGE:	6 mm to 100 mm

GOLD SNAKE

The high-grade water and cleaning hose



INNER LINING:	EPDM, black, non-porous, smooth
REINFORCEMENTS:	Synthetic fibres
COVER:	CR, black, fabric patterned
WORKING PRESSURE UP TO:	30 bar / 435 psi
TEMPERATURE RANGE:	from -30 °C / -22 °F up to +100 °C / +212 °F
DAMPABLE UP TO:	+130 °C / +266 °F (max. 30 minutes)
DIAMETER RANGE:	10 mm to 75 mm

TRIX ROTSTRAHL


The professional water hose



INNER LINING:	EPDM, black, non-porous, smooth
REINFORCEMENTS:	Synthetic fibres
COVER:	EPDM, black, smooth, from DN 28 upward fabric patterned
WORKING PRESSURE UP TO:	20 bar / 290 psi
TEMPERATURE RANGE:	from -40 °C / -40 °F up to +100 °C / +212 °F
DIAMETER RANGE:	13 mm to 50 mm

EURO TRIX


The versatile water hose



INNER LINING:	EPDM, black, non-porous, smooth
REINFORCEMENTS:	Synthetic fibres
COVER:	EPDM, black, smooth
WORKING PRESSURE UP TO:	15 bar / 218 psi
TEMPERATURE RANGE:	from -20 °C / -4 °F up to +100 °C / +212 °F
DIAMETER RANGE:	13 mm to 25 mm

AIR TRIX


The high quality hose for compressed air



INNER LINING:	SBR, black, non-porous, smooth
REINFORCEMENTS:	Synthetic fibres
COVER:	SBR, black, smooth, ozone-resistant
WORKING PRESSURE UP TO:	10 bar / 145 psi
TEMPERATURE RANGE:	from -25 °C / -13 °F up to +80 °C / +176 °F
FURTHER PROPERTIES:	According to DIN EN ISO 2398:2017
DIAMETER RANGE:	10 mm to 25 mm

UNITRIX 60

The Allrounder



INNER LINING:	NBR, black, non-porous, smooth
REINFORCEMENTS:	Synthetic fibres
COVER:	NBR, black, smooth
WORKING PRESSURE UP TO:	20 bar / 290 psi
TEMPERATURE RANGE:	from -25 °C / -13 °F up to +85 °C / +185 °F
FURTHER PROPERTIES:	Length independently electrically conductive, Ω-CL (acc. to EN ISO 8031)
DIAMETER RANGE:	6 mm to 25 mm

UNITRIX 80

The Allrounder



INNER LINING:	NBR, black, non-porous, smooth
REINFORCEMENTS:	Synthetic fibres
COVER:	NBR, black, smooth, > DN 25 CR-cover (fabric patterned)
WORKING PRESSURE UP TO:	33 bar / 479 psi
TEMPERATURE RANGE:	from -25 °C / -13 °F up to +85 °C / +185 °F
FURTHER PROPERTIES:	<= DN25: Ω-CL; > DN25: Ω-C (acc. EN ISO 8031)
DIAMETER RANGE:	6 mm to 60 mm

Industrial Fluid Solutions

Line systems for agricultural vehicles

Cab

- > Air-conditioning system

Exhaust system

- > Diesel particle filter
- > SCR system/urea

Chassis

- > Brake system
- > Hydraulics
- > Clutches/quick connector
- > Power steering





Engine

- > Compressor/
compressed air
- > Fuel supply
- > Engine cooling
- > Turbocharger
Lubrication & Cooling

Transmission

- > Transmission
Oil Cooling
- > Clutch

Contitech UK Ltd

Unit 1, Hindley Green Business Park,
Hindley Green
Wigan
WN2 4TN - UK
Phone : +44 1942 525500
industrial-hose.uk@continental.com

Sales Enquiries

ContiTech UK Limited,
Units 2-5, Waverley Road,
Beeches Industrial Estate,
Yate, Bristol
BS37 5QT - UK
Phone : +44 (0)1454 329888
Industrial-hose.UK@Continental.com

For further information :

[www.https://www.merlett.com/couk/](https://www.merlett.com/couk/)



For further information :

www.continental-industry.com

**Legal notice**

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2020 ContiTech AG. All rights reserved. For complete information go to: www.continental-industry.com/disl_en